


# ACE SuperTower20

Remote Head	
Camera	Any ENG camera, Chip Block, or Film Camera
Lens	Canon, Sony, Fujinon, Film Lens'
Remote Head	Nettmann MiniMote, Nettmann MicroPlus
Lens Height (From lowest point to highest)	MiniMote - 88" (7.3') to 256" (21.3')
Dimensions	
Foot Print	20"x20" - optional expandable weighted extensions
Travel Distance	14' Move (6' to 20')
Height for clearance (MiniMote)	24'
Lowest Height	72" to Mitchell Plate (69" to Tower plate)
Highest Height	240" (20') to Michell plate w/o use of additional risers
Payload	
Max Weight of Head + Camera	175 lbs
Travel Speeds	
Max Speed	6 fps / 1.8 mps
Accesleration	User programable ramps
Tower Control	
Operator Options	Joystick, pedals, computer, touchscreen
Special Options	
Ubangi	Offset to drop down camera on a MicroPlus Head
Power and Cabling	
Power Requirements	208V 3Φ 4 WIRE (35AMP) CAM-LOK #2 *OR* 30A (2130R) Twistlock
Built in Cable Management	Pre-built or assembled to production needs (Fiber, Paint, etc)
Shipping Weights and Sizes	
Column Weight - SuperTower 20	Sizes in inches / lbs 280 lbs
SuperTower Case#1 - Tower	77.5"x25"x30" / 450 lbs
SuperTower Case#2 - Accessories	47"x24"x30" / 150 lbs

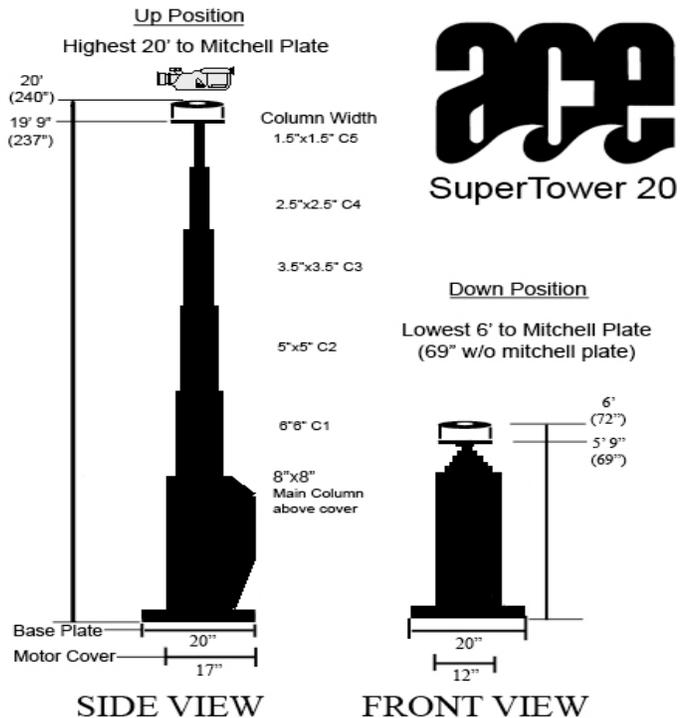

NOTE: Mitchell mount measurements  
Plate is 6.25" Square, Mitchell mount is 7" diameter circle  
Mount is 3" tall

[WWW.ACEEAST.COM](http://WWW.ACEEAST.COM)