
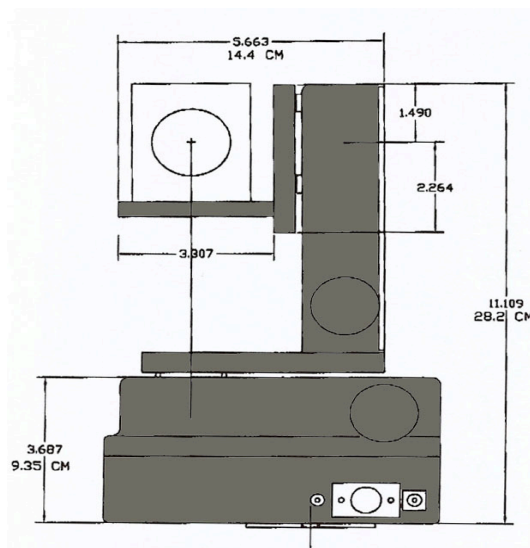


ACE MicroPlus HD

Camera Specs	
Camera	Panasonic AK-HC 1500G 2/3" Camera / Chip Block
Lens	Fujinon HD 7.6mm-136.8mm (Standard Supplied) Accepts any Canon or Fujinon Please NOTE: If using a 2 servo lens, an outboard Focus Servo must be provided. ACE can provide a FUJI focus servo. If using a Cannon lens, a tri-servo Lens or a Cannon Focus servo must be provided.
Lens Height (From base / center of lens) (2.5" riser)	12"
6" riser also available	15.5"
Dimensions	
Gross Weight - MicroPlus (Head and Camera)	~20 lbs
Base to Top of Camera (.5", 2.5", and 6" Risers)	13.5", 15.5", 19"
Mattnbox to Connectors (Panasonic AK-HC 1500G)	18"
Travel Distance at At 45° angle (back of camera)	3.5" up or down
Travel Distance at At 45° angle (front of camera) Lens	4" up or down
Travel Speeds	
Max Speed	Controlled panning speeds of 180°/ <1 Sec
Slowest Speed	Controlled panning speeds of 180°/10 Sec
Controls	
Operator Options	Operators desk can accommodate up to 4 systems at once
Range of Movement	
Pan	360° Continuous
Tilt	270°
Power & Cables	
Power Requirements	24-28 VDC (3A max) - Battery or AC
Cable Options	200ft BNC or up to 6000' over twisted pair (serial link)
Shipping Weights and Sizes	
	Sizes in inches / lbs
Gross Shipping Weight	280 lbs
MicroPlus Head Case	21"x17"x8" / 30 lbs
Camera/Lens Case	21"x17"x8" / 20 lbs
Control Desk Case	21"x17"x8" / 30 lbs
Cables Case	21"x17"x8" / 30 lbs
Grip Kit	21"x17"x8" / 60 lbs
Touch Screen Paint computer	28"x28"x16" / 70 lbs
Fiber Kit	24"x20"x10" / 40 lbs

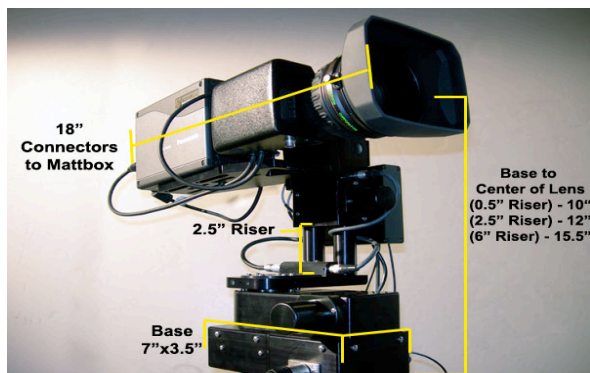

WWW.ACEEAST.COM